

TOTO LINK

The Smartest Network Device

Quick Installation Guide

Gigabit Switch

Suitable for: S505G,S808G

Copyright © TOTOLINK., All rights reserved.
Information in this document is subject to change without prior notice.
For more information, please go to www.totolink.net
台灣用戶請參閱背面繁體中文說明


P/N:134012120_Ver201510

1 Before Installation

Checking Package Contents

- 1* 5/8-Port 10/100/1000Mbps Switch
- 1* Power Adapter
- 1* Quick Installation Guide

Appearance

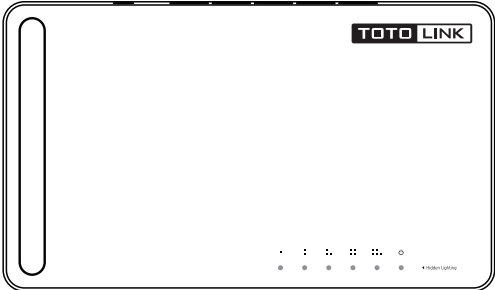

S505G

LED Indicators

LED Indicator	Status	Indication
PWR	on	Lights yellow when the switch is receiving power
	off	Powered off
LINK/ACT	on	Connected to network lights on, data transmission blinks yellow
	off	Not connected

TOTO LINK

The Smartest Network Device

快速安裝手冊

S505G & S808G Gigabit 乙太網路交換器


Copyright © TOTOLINK., 說明內容如有錯誤或更改, 恕不另行通知, 敬請見諒。
台灣地區
台灣吉翁電子股份有限公司
地址: 新北市中和區板南路498號4樓
聯絡電話: 02-22215559
更多產品資訊, 請參考 www.totolink.tw
客服免費專線: 0800-885799
手機請撥付費電話: 02-22215559
客服信箱: fae-tw@zioncom.net

1 產品介紹

包裝內容

- 1* 5/8埠 10/100/1000Mbps交換器
- 1* 電源供應器
- 1* 快速安裝手冊

產品外觀

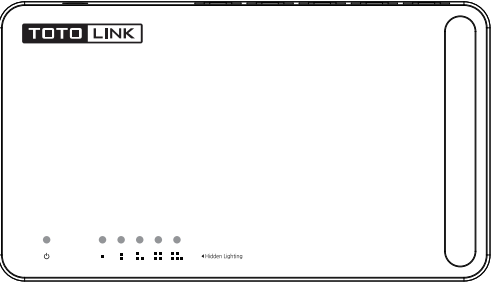


以S505G為例

LED燈號說明

LED指示燈	狀態	說明
PWR	燈亮	電源接通黃燈亮起
	熄滅	未連接電源
LINK/ACT	燈亮	連接網路孔黃燈亮起, 資料傳輸黃燈閃爍
	熄滅	網路孔未連接

2 Hardware Installation Refer to the application scene graph below

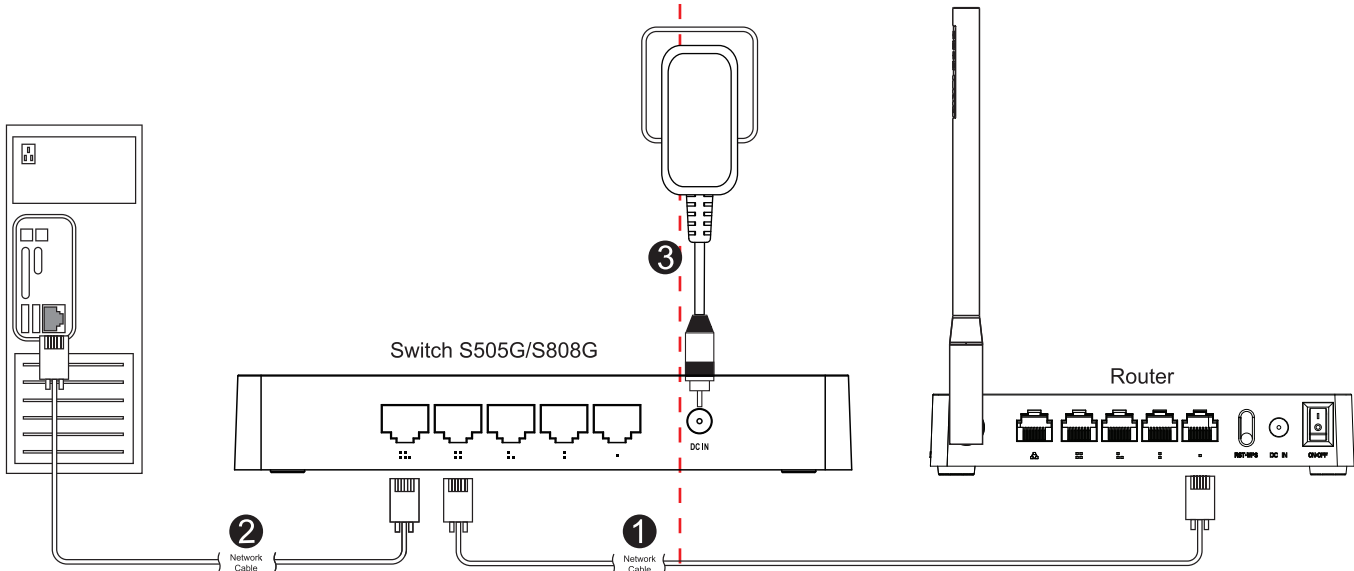


- 1 Connect one switch port to anyone of Router's LAN port.
- 2 Connect PC's RJ45 port to one switch port.
- 3 Plug power adapter into both switch's DC IN port and outlet.

SPEC

Standards	-IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab
Interface	5/8*10/100/1000Mbps auto-negotiation RJ-45 Ports (Auto MDI/MDIX)
Power Supply	S505G: 9V/0.5A; S808G: 9V/0.8A
Dimensions	163mm x 106mm x 25mm (L x W x H)
LED	1* Power, 5*LINK /Act
MAC Address Learning	Auto-learning, auto-aging
MAC Address Table	8K

2 接線方式 請參考下列說明

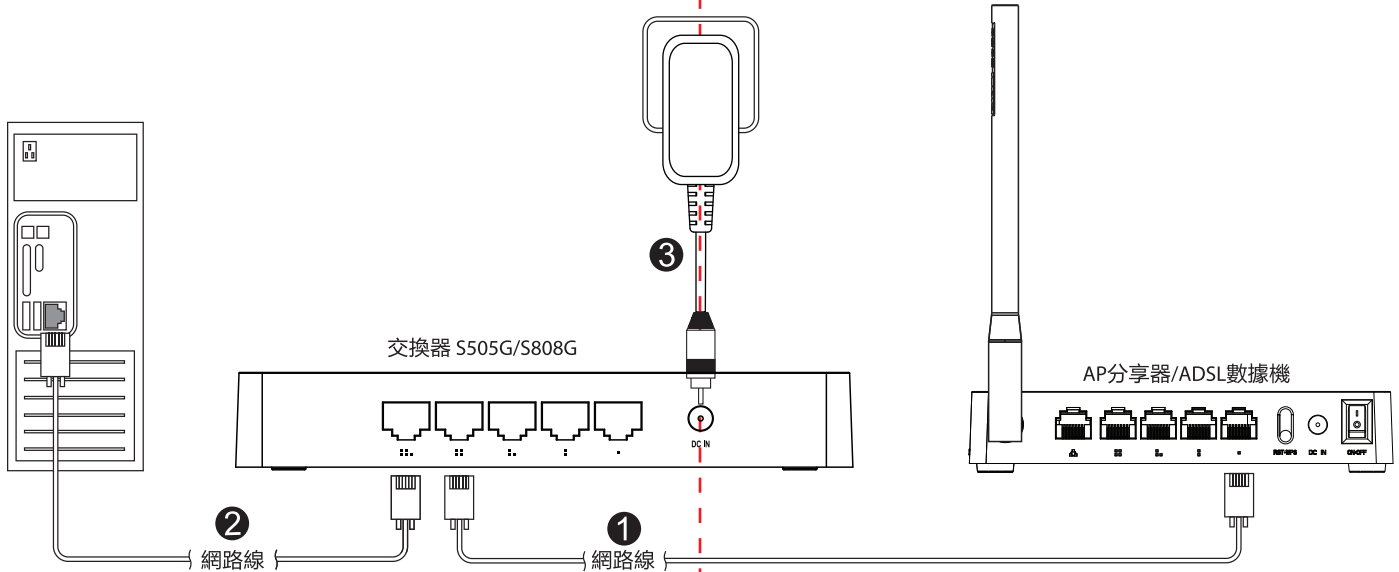

- 1 使用網路線, 連接交換器(任一網路孔)與AP分享器/ADSL數據機的區域網路孔。
- 2 使用第二條網路線, 連接交換器(任一網路孔)與電腦的網路孔。
- 3 連接電源。

產品規格

通訊協定	-IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab
連接埠	5/8埠10/100/1000Mbps自動調整RJ-45標準乙太網路連接埠(Auto MDI/MDIX)
電源供應	S505G: 9V/0.5A; S808G: 9V/0.8A
尺寸	163mm x 106mm x 25mm (長 x 寬 x 高)
LED燈	1個Power, 5/8個LINK /ACT
MAC Address Learning	Auto-learning, auto-aging
MAC位址列表	8K